

- Push-Pull locking system
- 3 – 5 contacts
- Degree of protection IP67
- Solder termination
- Diameter 9,5 mm



Description	Drawing	Contacts	Cable outlet	Ordering-No.
Male cable connector		3		99 4705 00 03
		4	3–4 mm	99 4709 00 04
		5		99 4713 00 05



Female cable connector		3		99 4706 00 03
		4	3–4 mm	99 4710 00 04
		5		99 4714 00 05



Male panel mount connector		3		09 4707 00 03
		4	-	09 4711 00 04
		5		09 4715 00 05



Female panel mount connector		3		09 4708 00 03
		4	-	09 4712 00 04
		5		09 4716 00 05




Specifications

Contacts	3	4	5
Wire gauge	max. 0,14 mm ² (max. AWG 26)		
Mechanical operation	> 1000 Mating cycles		
Temperature range	- 40 °C / + 80 °C		
Rated voltage	125 V		
Pollution degree	2		
Rated current (40°C)	1 A		
Contact plating	Au (Gold)		
Material of housing	PA		


Component part drawing

Cable connectors

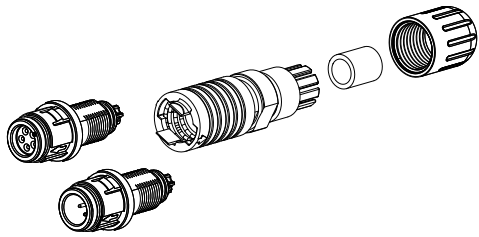

Female insert
Male insert
Locking device
Seal
Pressing screw

Panel mount connectors



Female panel mount connector
Male panel mount connector
Flat seal
Hexagonal nut

Contact arrangements male insert (mating side)

3 contacts



4 contacts



5 contacts



Contact arrangements female insert (mating side)



Panel cut out

